








# CP 364

Short Travel and Battery Probes  $\geq 6,50$  mm /  $\geq 260$  mil

## Available Tip Styles

Material	Tip Style	$\phi$ mm
B	F 	3,00
		4,00
		6,00
B	D 	4,00
B	BJ 	4,00
B	HS 	1,50
		3,00
B	HB 	4,00
		6,00
		8,00
B	V 	3,00
		4,00

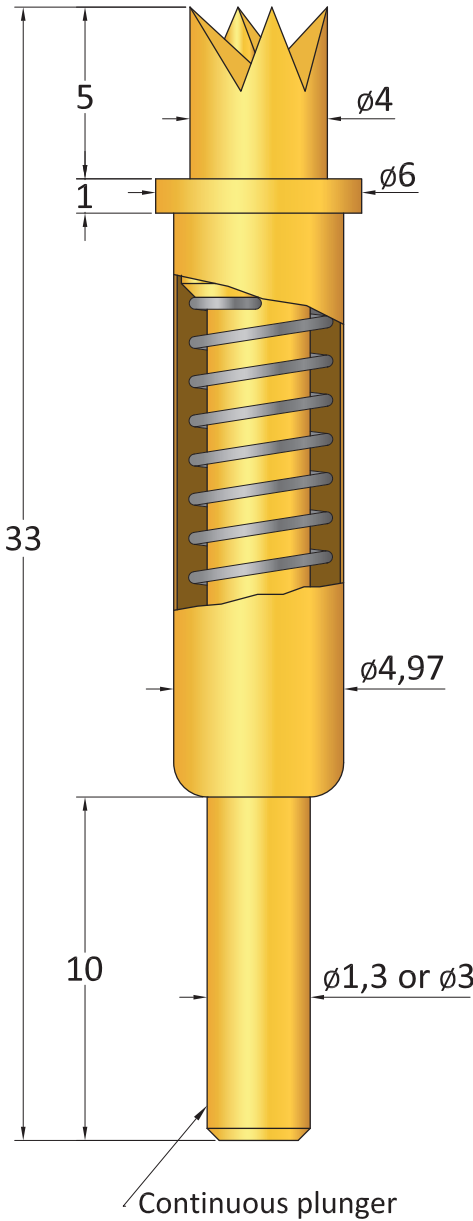

## Technical Data

Recommended minimum centers:	6,50 mm
Recommended working stroke:	3,20 mm
Maximum stroke:	4,00 mm
Current rating:	20,0 A
Typical contact resistance:	<20 m $\Omega$
Operating temperature range:	-50° up to +100°

## Materials

Plunger:	Brass or BeCu, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Stainless steel
Receptacle:	Brass, gold plated

## Spring Force ( g $\pm 20\%$ )








Spring force:	150 g
Alternative:	300 g
	400 g
	800 g

## Hole size without receptacle

Drills:  $\phi 4,96 - \phi 4,97$

## Hole size with receptacle

Drills:  $\phi 5,59 - \phi 5,60$



## Ordering example:

Series	Tip $\phi$ mm	Spring Force			
CP 364	D	400	Br	150	G
	Tip Style		Material		Plating
			B=BeCu		G=Gold
			Br=Brass		N=Nickel