






## Available Tip Styles

Material	Tip Style	$\phi$ mm
B	F 	2,50
		4,00
		6,50
B	D 	3,00
		4,00
B	H 	3,00
		4,00
B	HB 	4,00



## Technical Data

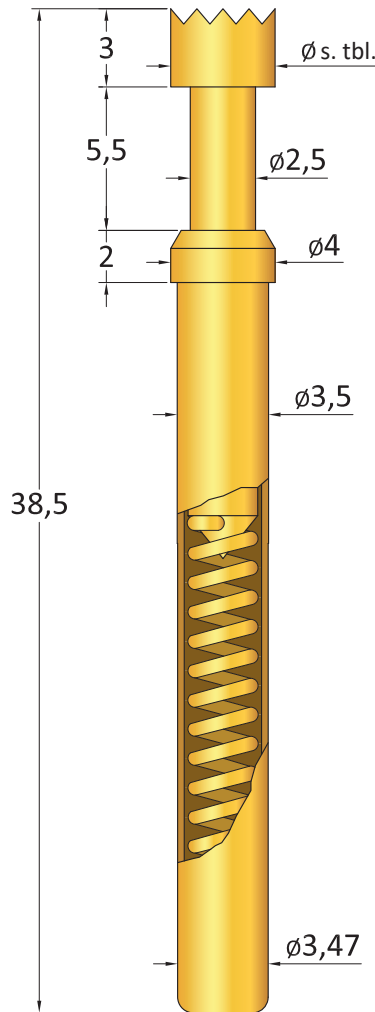Recommended minimum centers:	5,08 mm
Recommended working stroke:	4,40 mm
Maximum stroke:	5,50 mm
Current rating:	10,0 - 12,0 A
Typical contact resistance:	<20 m $\Omega$
Operating temperature range:	-50° up to +100°

## Materials

Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

## Spring Force ( g $\pm 20\%$ )




Spring force:	300 g
Alternative:	500 g

## Hole size without receptacle

Drills:	$\phi 3,49$ - $\phi 3,50$
---------	---------------------------

## Hole size with receptacle

Drills:	$\phi 3,99$ - $\phi 4,00$
---------	---------------------------

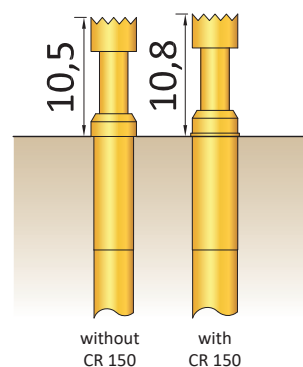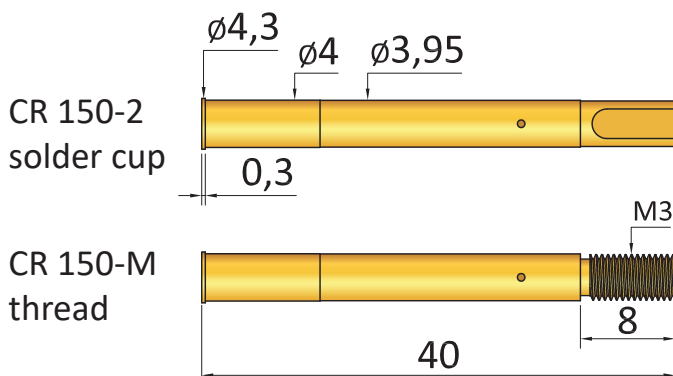

## Ordering example:

Series	Tip $\phi$ mm	Spring Force			
CP 854	H	400	B	300	G
	Tip Style		Material		Plating
			B=BeCu S=Steel		G=Gold N=Nickel