



Fine Pitch Probes

## FP480S01B034G050L158

Item number 1001399

### General

Design	Basic Contact Probe
Type/family	FP-S
Pitch (mm/mil)	1,00 / 39
Temperature [C°]	-45°C...+100°C

### Electrical specifications

Continuous current (A)	1.00
Typical contact resistance (mOhm)	65.00

### Mechanical specifications


Preload (cN)	15.00
Spring force (cN)	50.00
Nominal travel (mm)	2.00
Maximum travel (mm)	2.30
Pointing accuracy +/- (mm)	0.05

### Dimensions

Total length (mm)	15.80
Projection height (mm)	4.00
Tip style diameter (mm)	0.34
Barrel diameter (mm)	0.48

### Family drawing

All measurements are in mm.

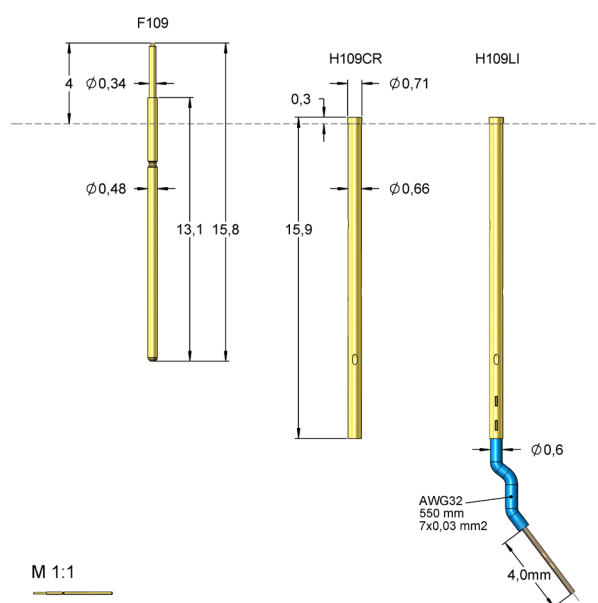

### Materials & surfaces

Tip style	01
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Bronze
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

### Accessories

Receptacle	H109
------------	------