









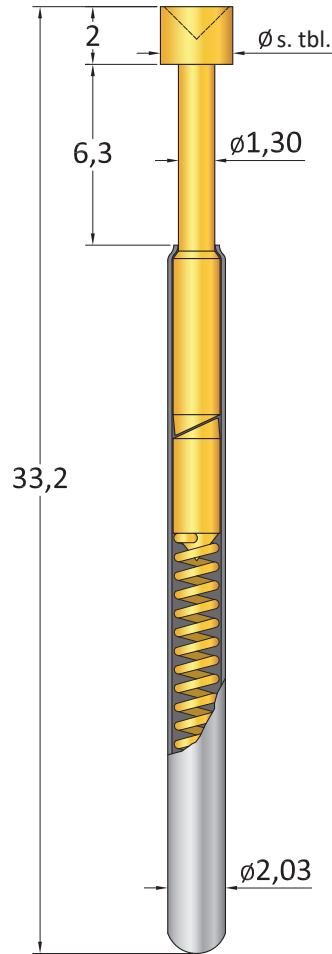


## Available Tip Styles

Material	Tip Style	$\phi$ mm
B	A 	2,54
B	F 	2,54
B	D 	2,03 2,54
B	E 	2,54
B	H 	2,54
B	HB 	2,54 4,00
B	T 	2,54
B	K 	2,54
B	I 	2,54
B	V 	2,54



## Technical Data

Recommended minimum centers:	3,18 mm
Recommended working stroke:	4,30 mm
Maximum stroke:	6,30 mm
Current rating:	10,0 - 15,0 A
Typical contact resistance:	<10 m $\Omega$
Operating temperature range:	-50° up to +100°

## Materials




Plunger:	BeCu, gold plated
Barrel:	Nickel-silver or Brass, silver plated
Spring:	Music wire, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

## Spring Force ( g $\pm 20\%$ )

Spring force:	200 g
Alternative:	300 g

## Hole size for receptacle

Drills for press ring as a stop:	$\phi 2,36$ - $\phi 2,37$
Drills for press ring insert:	$\phi 2,40$ - $\phi 2,45$

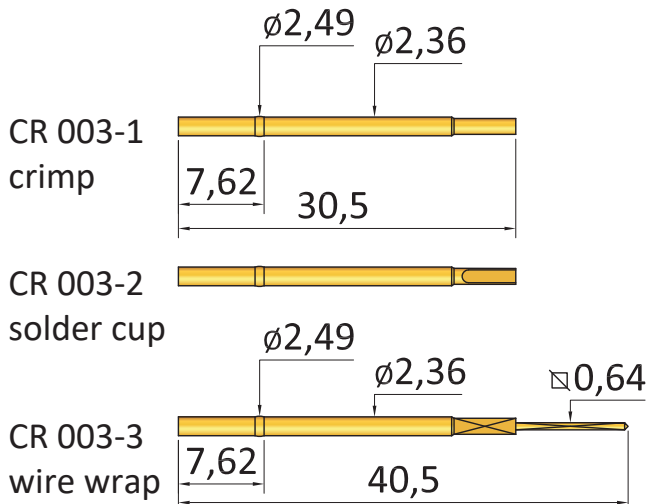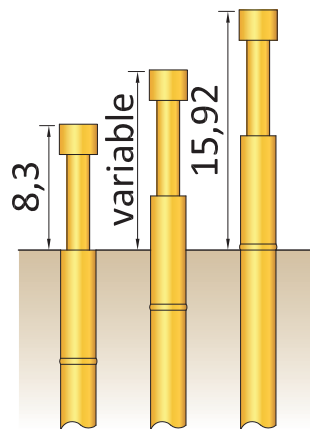

Series	Tip $\phi$ mm	Spring Force
HC 003	A 254 B	200 G
	Tip Style	Material B=BeCu Plating G=Gold